

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 July 2001 (12.07.2001)

PCT

(10) International Publication Number  
WO 01/49433 A1

- (51) International Patent Classification<sup>7</sup>: B22D 11/113, 21/04 (74) Agent: HANSEN, Willem, Joseph, Maria; Corus Technology BV, P.O. Box 10000, NL-1970 CA IJmuiden (NL).
- (21) International Application Number: PCT/EP01/00069 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date: 3 January 2001 (03.01.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 1014024 6 January 2000 (06.01.2000) NL (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): CORUS TECHNOLOGY BV [NL/NL]; P.O. Box 10000, NL-1970 CA IJmuiden (NL);

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): TAHITU, Gabriël, Julius, Raoul [NL/NL]; Beethovenlaan 69, NL-2215 SG Voorhout (NL). WESTERVELD, Jean, Pierre, André [NL/NL]; Clarionlaan 5, NL-2082 HJ Santpoort-Zuid (NL).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS AND METHOD FOR THE CONTINUOUS OR SEMI-CONTINUOUS CASTING OF ALUMINIUM

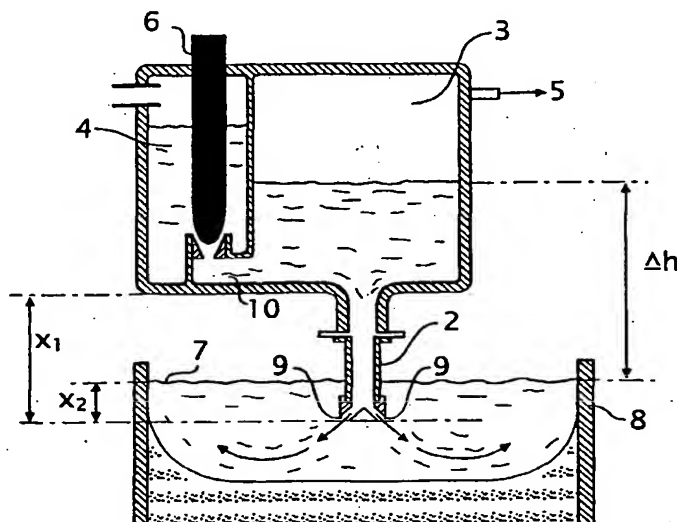

(57) Abstract: Apparatus for the continuous or semi-continuous casting of molten aluminium to form an ingot in the mould (8) of a casting machine, comprising a launder (4), a casting mould and feed means (2) which are coupled to the launder and extend into the casting mould, and wherein the feed means are connected to the underside of a tundish (3), said tundish is provided with an inlet member (10) for admitting molten aluminium from the launder (4) into the tundish and further with pressure-reducing means (5) for lowering the absolute gas pressure in that part of the tundish which is above the molten aluminium admitted into the tundish.

BEST AVAILABLE COPY

WO 01/49433 A1

## APPARATUS AND METHOD FOR THE CONTINUOUS OR SEMI-CONTINUOUS CASTING OF ALUMINIUM

The invention relates to an apparatus for the continuous or semi-continuous casting of molten aluminium to form an ingot in the mould of a casting machine, the apparatus comprising a launder, a casting mould and feed means which are coupled to the launder and extend into the casting mould. The invention also relates to a method for the continuous or semi-continuous casting of molten aluminium to form ingots from a launder by using feed means which are coupled to the feed trough and extend into a casting mould.

It should be noted that where the present patent application refers to ingots, this term is also intended to include billets (which have an essentially round cross sectional area) or other forms of castings.

An apparatus for casting aluminium ingots which is in widely used on an industrial scale uses two metal levels and comprises a launder or a transfer ladle positioned at a higher level than the casting mould or series of casting moulds beneath it. Apparatus of this type include, without any restriction being made, apparatus for the direct chill casting (DC) process and the electromagnetic casting (EMC) process. Molten aluminium is transferred from a casting furnace, via the launder into the casting mould by means of feed means, such as a spout, an immersion pipe or a casting nozzle, said feed means being coupled to the launder and often forming an exit port in the bottom or base of the launder. The casting nozzle exits below the meniscus of the molten aluminium into the casting mould. The exit or outlet opening of the casting nozzle is generally situated approximately 20 to 60 mm below said meniscus. To enable the flow of the aluminium out of the casting nozzle into the casting mould to be controlled to some extent in terms of direction and velocity, and therefore also to allow the ultimate macro-segregation profile in the cast ingot to be controlled, it is customary for a bag made from a glass-fibre material to be situated beneath the outlet opening.

A drawback of using a such a glass-fibre bag is that an individual cast is generally difficult to reproduce. Another drawback is that oxides may adhere to the glass-fibre material during casting, and at irregular intervals become detached from this material, thus having an adverse effect on the quality of the ingot. Another drawback is that in the start-up phase of a casting operation there may be an accumulation of large quantities of oxides in the glass fibre bag, which oxides then, during casting, may enter into the cast ingot and consequently have an adverse effect on the quality of the ingot.

An object of the invention is to provide an improved apparatus which does not have the above mentioned drawbacks, or at least has these drawbacks to a much lesser extent.

CONFIRMATION COPY

Another object of the invention is to provide a method for casting aluminium ingots which does not have the above mentioned drawbacks or at least has these drawbacks to a much lesser extent.

5 In one aspect of the invention there is provided an apparatus characterized in that the feed means are connected to a tundish, which tundish is provided with an inlet member for admitting molten aluminium from the launder into the chamber of the tundish and further with pressure-reducing means for lowering the absolute gas pressure in that part of the tundish which is above the liquid aluminium admitted into the chamber of the tundish.

10 The use of a tundish in a casting machine of this type for the continuous or semi-continuous casting of an aluminium ingot means that the flow velocity of the molten aluminium into the casting mould can be controlled much more successfully by means of the gas pressure and therefore, a macro-segregation profile which is much more reproducible and flatter is being obtained in the resultant ingot. Furthermore, the use of  
15 the known glass-fibre material bag is no longer required, and consequently all the associated drawbacks have been overcome. Furthermore, the reduced gas pressure in that part of the tundish which lies above the molten aluminium admitted into the tundish, being in the chamber of the tundish, achieves the effect that the formation of a whirlpool or vortex in the direct vicinity of the transfer area from the tundish to the feed  
20 means, such as a casting nozzle, being considerably reduced. A further advantage is a much more stable and less fluctuating meniscus in the casting mould.

An embodiment of the apparatus according to the invention is characterized in that the pressure-reducing means produce an absolute gas pressure in a range from 0.50 to 0.97 bar in that part of the tundish which lies above the liquid aluminium admitted  
25 into the chamber of the tundish. This corresponds to an absolute pressure difference with respect to atmospheric pressure of from 0.50 to 0.03 bar. Even a relatively small absolute pressure difference results in a considerable improvement in the control of the fluid flow velocity of the aluminium into the casting mould.

A preferred embodiment of the apparatus according to the invention is  
30 characterized in that the pressure-reducing means produce an absolute gas pressure in a range from 0.75 to 0.95 bar in that part of the tundish which lies above the liquid aluminium admitted into the chamber of the tundish. This corresponds to an absolute pressure difference with respect to atmospheric pressure of from 0.25 to 0.05 bar. This leads to a further improvement in the control of the fluid flow velocity of the  
35 aluminium into the casting mould.

It has been found that, when casting aluminium alloys which comprise alloying elements with a lower vapour pressure than molten aluminium at a given temperature, such as for example magnesium, when using the apparatus according to the invention

there are no significant problems with the slightly reduced atmospheric pressure in the tundish. It is possible that due to the reduced gas pressure some degassing of the molten aluminium occurs, but this degassing is not the objective of the present invention.

5 An embodiment of the apparatus according to the invention is characterized in that the feed means comprise a casting nozzle which is formed in such a way that the flow pattern of the aluminium into the casting mould is substantially stable and symmetrical. The invention is partly based on the insight that a tundish comprising a chamber with a reduced gas pressure offers the possibility of moving away from the known casting nozzles or spouts, together with the associated drawbacks, and allows  
10 for the selection a casting nozzle which is much more suitable for imposing and maintaining a desired fluid flow pattern in the casting mould. The desired flow pattern may relate to both the symmetry, the stability, the outlet velocity, the outlet direction and suitable or desired combinations thereof.

An embodiment of the apparatus according to the invention is characterized in  
15 that the total cross-sectional outlet area of the casting nozzle,  $A_{\text{castingnozzle}}$ , divided by the horizontal cross-sectional area of the casting mould (which essentially corresponds to the thickness multiplied by the width of the aluminium ingot),  $A_{\text{castingmould}}$ , lies in a range from 0.0001 to 0.1, and preferably lies in a range from 0.001 to 0.1. The dimensionless loss-coefficient related to the mean velocity of the molten aluminium in the cross-  
20 sectional outlet area of the casting nozzle typically lies in a range less than  $1.6 \cdot 10^6$ , and preferably in a range of less than 10.

Depending on the width of the ingot to be cast, it is also possible for two or more casting nozzles to open out into one casting mould.

An embodiment of the apparatus according to the invention is characterized in  
25 that the outlet opening of the feed means, preferably a casting nozzle, lies in a range of more than 20 mm below the meniscus of the molten aluminium in the casting mould, preferably in a range of not more than 150 mm, and more preferably in a range of 40 to 70 mm.

It has been found that the apparatus according to the invention is particularly  
30 suitable for casting substantially rectangular ingots with a thickness and a width, the thickness being larger than 450 mm and preferably greater than 500 mm.

It has been found that the apparatus according to the invention is particularly suitable for casting substantially rectangular ingots with a thickness and a width, the width being larger than 2000 mm, preferably larger than 2300 mm, and more preferably  
35 larger than 2500 mm.

Aluminium ingots with a cross section of 450 by 2300 mm or greater are often referred to in the art as "jumbo" ingots. Ingots of this size are very difficult to cast continuously or semi-continuously and often have a macro-segregation profile which is

difficult to reproduce and is highly unfavourable. Producing very large ingots of this dimension with the aid of the apparatus according to the present invention leads to considerable advantages, in particular a favourable macro-segregation profile and a more controllable flow of the molten aluminium into the casting mould.

5 In a further aspect of the invention there is provided a method for the casting of molten aluminium to form an ingot in the mould of a casting machine, comprising the steps of casting molten aluminium via a launder and by using feed means which are coupled to said launder and extend into said casting mould, characterized in that the feed means are connected to a tundish, which tundish is provided with an inlet member  
10 for admitting molten aluminium from the launder to the tundish and maintaining the absolute gas pressure in that part of the tundish which lies above the liquid aluminium which has been admitted with pressure-reducing means.

When using the method according to the invention for the continuous or semi-continuous casting of an aluminium ingot, the fluid flow velocity of the aluminium into  
15 the casting mould can be controlled much more successfully, and therefore, a macro-segregation profile which can be reproduced more successfully and is more favourable is obtained in the final cast ingot. Furthermore, it is no longer necessary to use a glass-fibre material bag, with the result that all the associated drawbacks are overcome. Furthermore, a reduced gas pressure in that part of the tundish which lies above the  
20 molten aluminium admitted means that the formation of a whirlpool or vortex in the direct vicinity of the transition area from the tundish to the feed means, such as a casting nozzle, is considerably reduced.

An embodiment of the method according to the invention is characterized in that an absolute gas pressure in a range from 0.50 to 0.97 bar is selected in that part of the  
25 tundish which lies above the liquid aluminium admitted into the tundish, and more particularly in that an absolute gas pressure in a range from 0.75 to 0.95 bar is selected in that part of the tundish which lies above the liquid aluminium admitted into the tundish. Even a relatively small absolute pressure difference results in a considerable improvement in the control of the fluid flow velocity of the aluminium into the casting  
30 mould. A further advantage and a preferred arrangement is that the stopper rod, as a control member, no longer has to be located directly above or in alignment with the casting nozzle. As a result, disruption caused by a stopper rod no longer affects the fluid flow pattern of an immersion pipe or casting nozzle. Furthermore, this achieves the effect of a desirable and more stable, uniform and symmetrical inlet fluid flow.

35 In a further embodiment of the method according to the invention, the method is characterized in that the aluminium is cast so as to form a substantially rectangular ingot with a thickness of 450 mm or more, and more preferably of 500 mm or more, and furthermore in that the aluminium is cast so as to form a substantially rectangular

ingot with a width of 2000 mm or more, preferably more than 2300 mm, and more preferably 2500 mm or more.

Aluminium ingots with a cross-sectional area of 450 by 2000 mm or larger are often referred to in the art as "jumbo" ingots. Large ingots of this type are very difficult to cast continuously or semi-continuously and often have a macro-segregation profile which is difficult to reproduce and unfavourable. Manufacturing large ingots of this dimension by means of the method according to the invention leads to considerable advantages, in particular a much more favourable macro-segregation profile as a result of more successful control of the fluid flow of the aluminium into the casting mould.

It has also been found that the method and apparatus according to the invention have proven particularly suitable for the production of ingots from wrought aluminium alloys with a high content of alloying elements, in particular the aluminium alloys from the Aluminium Association (AA)2xxx, the (AA)5xxx, and (AA)7xxx series, such as, but not limited thereto, 2024, 2034, 5053, 5069, 7010, 7050, 7075 and modifications thereof.

Furthermore, the invention relates to a casting nozzle for use in the apparatus according to the invention or for use in the method according to the invention, as described in more detail above and in the figures.

Furthermore, the invention relates to a tundish for use in the apparatus according to the invention or for use in the method according to the invention, as described in more detail above and in the figures.

The invention will be described below with reference to the figures showing non-limiting exemplary embodiments. In the figures:

Fig. 1 shows a schematic view of a continuously or semi-continuously operating apparatus for producing an aluminium ingot using the invention, and Figs. 2a and 2b show a schematic cross-section through a casting nozzle for coupling to a tundish in an apparatus according to this invention.

Fig. 1 schematically shows an apparatus for the semi-continuous casting of an ingot 1, in which a tundish 3 is provided, connected to pressure-reducing means 5, such as a vacuum pump, for lowering the gas pressure in that part of the tundish 3 which lies above the molten aluminium admitted, and an inlet member 10 is also provided for admitting molten aluminium from a launder 4 into the tundish. Normal atmospheric pressure prevails in the launder 4. The inlet of molten aluminium can be regulated by means of a stopper rod 6. The regulating system for admitting molten aluminium can be of automated design. To regulate the molten aluminium flowing from the tundish 3 into the casting mould 8, it is not necessary for the stopper rod 6 to be situated directly above or in direct alignment with the feed means, said feed means being the casting nozzle. This arrangement is even preferred. The molten aluminium flows via feed

means 2, such as a casting nozzle, which are connected to the tundish, into a casting mould 8. The feed means 2 extend to below the meniscus 7 of the molten aluminium in the casting mould. The distance  $X_2$  between the meniscus 7 of the molten aluminium and the outlet opening 9 of the feed means 2 preferably lies in a range of less than 70 mm. This is particularly important when casting "jumbo" ingots. The distance  $X_1$  between the bottom of the tundish 3 and the outlet opening 9 of the feed means 2 preferably lies in a range from 300 to 500 mm, and preferably in a range from 400 to 500 mm. The height difference  $\Delta h$  between the fluid level in the tundish and the fluid level 7 in the casting mould typically lies in a range from 150 to 1500 mm, and preferably in a range from 150 to 1000 mm.

Fig. 2a schematically shows a casting nozzle 2 which has proven particularly suitable for use in combination with the tundish according to the invention. The casting nozzle comprises two symmetrical outlet openings 9 which are at an angle  $\alpha_1$  with respect to a longitudinal axis, which longitudinal axis, in operation, forms the axis of suspension. In Fig. 2a,  $\alpha_1$  is equal to  $20^\circ$  with respect to the horizontal and typically lies in a range from  $10^\circ$  to  $90^\circ$ . The casting nozzle is made from a suitable refractory material. The cross section of the casting nozzle may be in various forms, such as oval and round. The outlet openings may also be in various forms. In Fig. 2b,  $\alpha_1$  is equal to  $20^\circ$  and, independently of this,  $\alpha_2$  can be selected in a range from  $10^\circ$  to  $90^\circ$ , and preferably  $20^\circ$  to  $90^\circ$ .

Having now fully described the invention, it will be apparent to one of ordinary skill in the art that many changes and modifications can be made without departing from the spirit or scope of the invention as set forth by the claims appended hereto.

## CLAIMS

1. Apparatus for the continuous or semi-continuous casting of molten aluminium to form an ingot in the mould of a casting machine, the apparatus comprising a launder, a casting mould and feed means which are coupled to the launder and extend into the casting mould, characterized in that the feed means are connected to the underside of a tundish, said tundish is provided with an inlet member for admitting molten aluminium from the launder into the tundish and further with pressure-reducing means for lowering the absolute gas pressure in that part of the tundish which is above the molten aluminium admitted into the tundish.
2. Apparatus according to claim 1, wherein the pressure-reducing means, during use, are able to produce an absolute gas pressure in a range from 0.50 to 0.97 bar in that part of the tundish which lies above the molten aluminium admitted into the tundish.
3. Apparatus according to claim 2, wherein the pressure-reducing means, during use, are able to produce an absolute gas pressure in a range from 0.75 to 0.95 bar in that part of the tundish which lies above the molten aluminium admitted into the tundish.
4. Apparatus according to any one of claims 1 to 3, wherein the feed means comprise a casting nozzle, which is formed in such a way that the fluid flow pattern of the molten aluminium into the casting mould is substantially stable and symmetrical.
5. Apparatus according to claim 4, wherein the total outlet area of the casting nozzle divided by the horizontal cross sectional area of the casting mould lies in a range from 0.0001 to 0.1, and preferably in a range from 0.001 to 0.1.
6. Apparatus according to any one of claims 1 to 5, for casting an ingot having a length, a width and a thickness, and wherein the casting mould has dimensions for casting an ingot with a thickness of 450 mm or more.
7. Apparatus according to any one of claims 1 to 6, for casting an ingot having a length, a width and a thickness, and wherein the casting mould has dimensions for casting an ingot with a width of 2000 mm or more.



8. Method for the continuous or semi-continuous casting of molten aluminium to form an ingot in the mould of a casting machine, comprising the steps of casting molten aluminium via a launder and by using feed means which are coupled to said launder and extend into a casting mould, characterized in that the absolute gas pressure is being lowered, by means of pressure-reducing means, above the molten aluminium admitted into a tundish, said tundish being coupled at its underside to the feed means and is further provided with an inlet member for admitting molten aluminium from launder into the tundish.
9. Method according to claim 8, wherein in use, an absolute gas pressure in a range from 0.50 to 0.97 bar is applied in that part of the tundish which lies above the molten aluminium admitted into the tundish.
10. Method according to claim 9, wherein in during use, an absolute gas pressure in a range from 0.75 to 0.95 bar is applied in that part of the tundish which lies above the molten aluminium admitted into the tundish.
11. Method according to any one of claims 8 to 10, wherein the aluminium is cast into a substantially rectangular ingot having a thickness and a width, the thickness being 450 mm or more.
12. Method according to any one of claims 8 to 11, wherein the aluminium is cast into a substantially rectangular ingot having a thickness and a width, the width being 2300 mm or more.
13. Casting nozzle for use in an apparatus according to claim 4 or 5 or in the method according to any one of claims 8 to 12.
14. A tundish for use in an apparatus according to any one of claims 1 to 3 or in the method according to any one of claims 8 to 10.

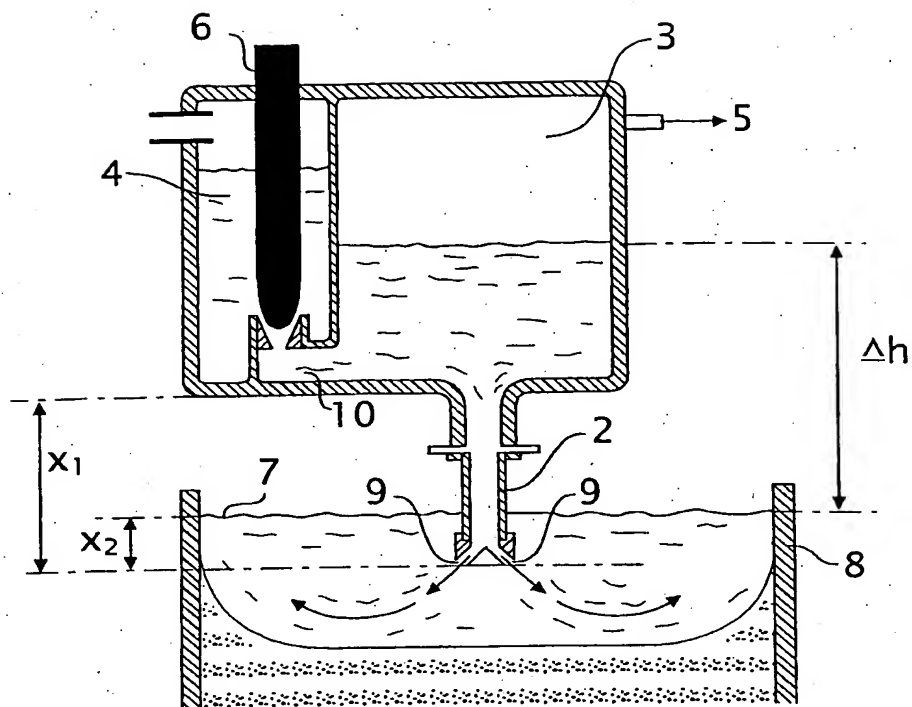


Fig. 1

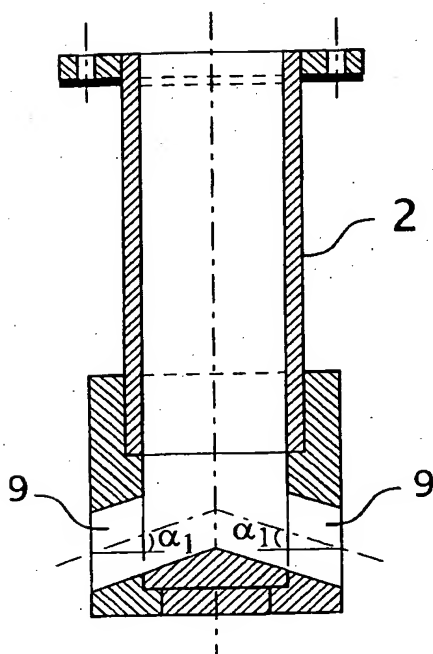


Fig.2a

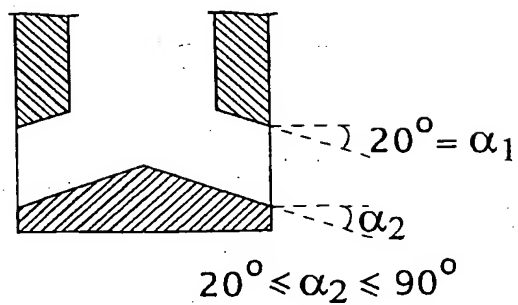


Fig.2b

# INTERNATIONAL SEARCH REPORT

International Application No

PC1/EP 01/00069

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B22D11/113 B22D21/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B22D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NL 1 001 976 C (HOOGOVS GROEP BV) 1 August 1997 (1997-08-01) claims 1,3; figure 1	1,4,5, 13,14
X	FR 2 675 411 A (SIDERURGIE FSE INST RECH) 23 October 1992 (1992-10-23) page 3, line 9 -page 5, line 6; figure 1	1,8,13, 14
X	DE 20 17 469 A (VOEST) 22 October 1970 (1970-10-22) page 7, paragraph 2; figures 1-7	1,4
X	PATENT ABSTRACTS OF JAPAN vol. 007, no. 116 (M-216), 20 May 1983 (1983-05-20) & JP 58 035051 A (KAWASAKI SEITETSU KK), 1 March 1983 (1983-03-01) abstract	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

19 April 2001

Date of mailing of the international search report

27/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mailliard, A

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/00069

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 44 03 049 C (MANNESEMAN AG) 7 September 1995 (1995-09-07) page 2, line 3 -page 3, line 50 -----	5
A	US 4 668 288 A (OUCHI YUTAKA ET AL) 26 May 1987 (1987-05-26) abstract; figure 1 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/00069

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
NL 1001976 C	24-06-1997	AT 185722 T	15-11-1999
		AU 698335 B	29-10-1998
		AU 1305597 A	17-07-1997
		BR 9612276 A	13-07-1999
		CA 2241045 A	03-07-1997
		CN 1207696 A	10-02-1999
		CZ 9801939 A	13-01-1999
		DE 69604825 D	25-11-1999
		DE 69604825 T	25-05-2000
		WO 9723319 A	03-07-1997
		EP 0869854 A	14-10-1998
		ES 2140152 T	16-02-2000
		JP 3046078 B	29-05-2000
		JP 11509140 T	17-08-1999
		PL 327465 A	07-12-1998
		SK 86898 A	07-05-1999
FR 2675411 A	23-10-1992	NONE	
DE 2017469 A	22-10-1970	AT 302550 B	15-09-1972
		AT 322754 B	10-06-1975
		BE 748898 A	16-09-1970
		CH 525051 A	15-07-1972
		FR 2041172 A	29-01-1971
		GB 1310551 A	21-03-1973
		SE 356914 B	12-06-1973
		US 3718175 A	27-02-1973
JP 58035051 A	01-03-1983	JP 1060339 B	22-12-1989
		JP 1576762 C	24-08-1990
DE 4403049 C	07-09-1995	AT 164540 T	15-04-1998
		AU 1453595 A	15-08-1995
		BR 9506653 A	16-09-1997
		CA 2181908 A	03-08-1995
		CN 1139892 A, B	08-01-1997
		WO 9520445 A	03-08-1995
		DE 59501780 D	07-05-1998
		DK 734295 T	19-10-1998
		EP 0734295 A	02-10-1996
		ES 2114304 T	16-05-1998
		JP 3085978 B	11-09-2000
		JP 9508070 T	19-08-1997
		RU 2134178 C	10-08-1999
		ZA 9500671 A	28-09-1995
US 4668288 A	26-05-1987	JP 1893088 C	26-12-1994
		JP 6020618 B	23-03-1994
		JP 61219451 A	29-09-1986
		DE 3609900 A	06-11-1986
		FI 861318 A, B,	27-09-1986
		KR 9403252 B	16-04-1994
		US 4714104 A	22-12-1987

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**